
WATERWORKS

ETOILE ETLS50

Etoile Low Profile Three Hole Deck Mounted Lavatory Faucet (Flared Spout) with Lever Handles

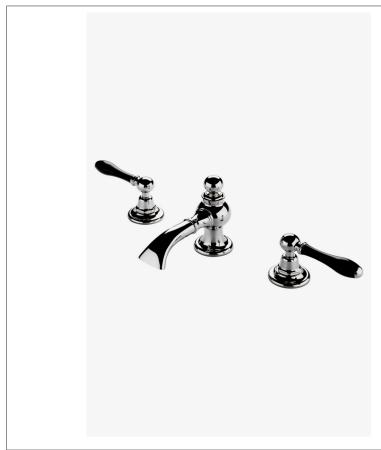

SHOWN IN ETOILE LOW PROFILE THREE HOLE DECK MOUNTED LAVATORY FAUCET (FLARED SPOUT) WITH LEVER HANDLES

INSPIRATION

Defined elegance. Etoile has a European sophistication with a timeless sense of chic.

TECHNICAL DETAILS

ADA Compliance: Yes

Adjustable versus Fixed Spray: Fixed Spray

Deck Thickness Maximum: 1 1/2" Deck Thickness Minimum: 0" Drain Assembly Materials: Brass

Drain Depth Maximum: 1 3/4" Drain Hole Diameter: 1 3/4"

Drain Style: Pop-up

Escutcheon Primary Material: brass Fittings Hole Diameter: 1 3/8" Flow Restriction Options: #N/A Handle Spread Maximum: 12"

Handle Spread Minimum: 8"

Handle Turn Angle: Quarter Turn

Depth / Width: 6 3/4"

Drain Depth Minimum: 1 3/8"

Height: 5 3/4"

Inlet Connection Size: 1/2"

Inlet Connection Type: Male with Supply Nut

Inlet Supply Spread Maximum: 12" Inlet Supply Spread Minimum: 8" Installation Type: Deck Mounted

Length: 18"

Number of Handles: Two Number of Holes: Three Hole Primary Material: Brass Spout Swivel: N Suggested Application: Bath

Valve Material: Ceramic Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

CODES & STANDARDS

Code # ETLS50: Certified with IAPMO, NSF, CEC & State of MA.
Complies with ASME A112.18.1 / CSA B125.1, ANSI 61 Sect. 9, ANSI
A117.1 ADA, & ASTM E 1621-05.

PRODUCT FEATURES

Ebony lever handles

Includes European size pop up drain

Features graceful, elongated curves

Stocked in Chrome, Nickel, Matte Nickel, and Unlacquered Brass

Available in 2.2gpm (8.3L/min) flow rate

CERTIFICATIONS



PRODUCT (NOTES)

Sold with European style drain; USA style drain sold separately for use with non-Waterworks sinks.

ETOILE ETLS50

Etoile Low Profile Three Hole Deck Mounted Lavatory Faucet (Flared Spout) with Lever Handles

