
HENRY

HNTF10

Henry Low Profile Concealed Tub Filler With Handshower and Metal Lever Handles

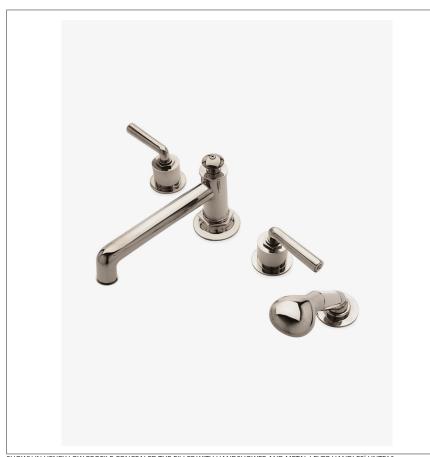

TECHNICAL DETAILS

ADA Compliance: Yes Adjustable versus Fixed Spray: Fixed Spray Deck Thickness Maximum: 1 3/8" Deck Thickness Minimum: 3/16" Diameter of Head: 1 7/8" Escutcheon Primary Material: Brass Fittings Hole Diameter: 1 5/8" Flow Restriction Options: 2.0, 1.75, 1.5, 0.92 Handle Spread Maximum: 12" Handle Spread Minimum: 10" Handle Turn Angle: Quarter Turn Handshower / Spray Hose Length: 79" Depth / Width: 10" Height: 6 5/16" Inlet Connection Size: 3/4" Inlet Connection Type: Male NPT Adapter Inlet Supply Spread Maximum: 12" Inlet Supply Spread Minimum: 10" Installation Type: Deck Mounted Integrated Diverter: N Integrated Spray: N Length: 19 9/16" Number of Handles: Two Number of Holes: Four Hole Pivot: N Primary Material: Brass Restricted Maximum Flow Rate: 2.5 gpm Spout Swivel: N Spray Included in Unit: N Suggested Application: Bath Valve Material: Ceramic Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

SHOWN IN HENRY LOW PROFILE CONCEALED TUB FILLER WITH HANDSHOWER AND METAL LEVER HANDLES HNTF10

INSPIRATION

Influenced by the connection of industry and art Henry easily transitions between modern, traditional, utilitarian and classic settings.

CODES & STANDARDS

Code # HNTU10X: Complies with ASME A112.18.1/CSA B125.1, ASTM E 1621-05 & ANSI A117.1 ADA. Certified with IAPMO, cUPC & State of MA

PRODUCT FEATURES

Brass material is used for components


Brass material is used for component.

Stocked in 2.5gpm (9.5 L/min) and 1.75gpm (6.6 L/min). State of California requires 1.75gpm (6.6 L/min) to comply with their water conservation requirements. Other flow options are available to order, contact your sales associate or call 1 (800) 899-6757 for details.



HENRY

Henry Low Profile Concealed Tub Filler With Handshower and Metal Lever Handles

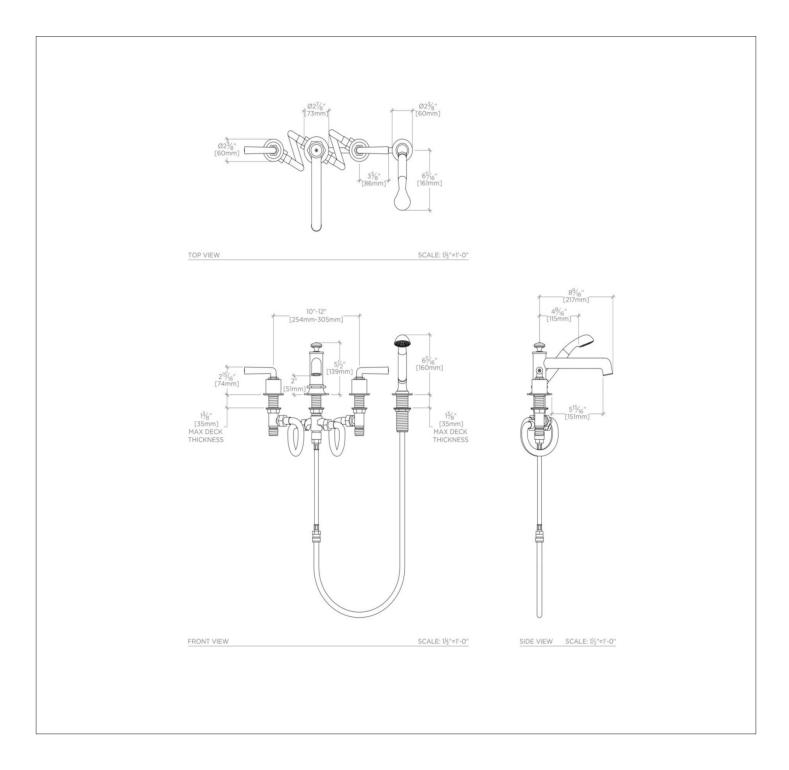

HNTF10