
### REGULATOR

## RGKM20

### Regulator Gooseneck Single Spout Kitchen Faucet, Black Wheel Handle and Spray

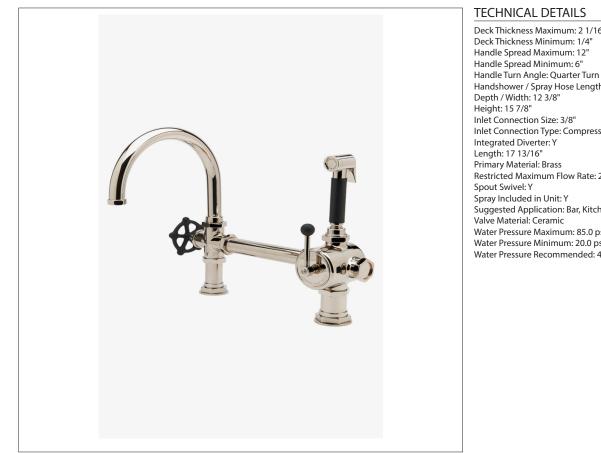

L SHOWN IN REGULATOR GOOSENECK SINGLE SPOUT KITCHEN FAUCET, BLACK WHEEL HANDLE AND SPRAY| RGKM20

#### **INSPIRATION**

A play on industrial controls from the early 1900s, when pride was lavished on parts. Translated to handcrafted, fittings project rugged beauty through powerful, detailed shapes.

Deck Thickness Maximum: 2 1/16" Handle Turn Angle: Quarter Turn Each Way Handshower / Spray Hose Length: 49" Inlet Connection Type: Compression Connection Hoses Restricted Maximum Flow Rate: 2.2 gpm Suggested Application: Bar, Kitchen, Laundry Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

#### **CODES & STANDARDS**

Code # RGKM20: CEC

#### **PRODUCT FEATURES**

Casted brass temperature mixing valve. The user rotates the center control handle for preferred temperature. Solid brass wheel handles finished in matte black to control on/off/volume. Paint resistant to hard water Built-in automatic diverters for spray operation.

Standard flow rate is 2.2gpm (8.3 L/min) and State of California requires a maximum of 1.8gpm(6.8 L/min). Also available in high efficiency flow options. Contact a sales associate for details.

#### **PRODUCT (NOTES)**

Drilling size requirements are 2 1/4" for mixing/spray body and 1 3/4" for faucet body.

### REGULATOR

### RGKM20

# Regulator Gooseneck Single Spout Kitchen Faucet, Black Wheel Handle and Spray

