
**BOND** BKM12S

Bond Rally Series One Hole Gooseneck Integrated Pull Spray Kitchen Faucet with Lever Handle

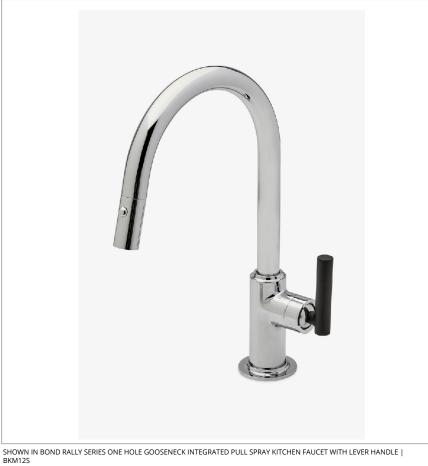

# **TECHNICAL DETAILS**

ADA Compliance: Yes

Adjustable Versus Fixed Spray: Adjustable

Deck Thickness Maximum: 2 1/4" Deck Thickness Minimum: 1/4" Fittings Hole Diameter: 1 1/2" Handle Turn Angle: Tilt and Turn Handshower Spray Hose Length: 59"

Inlet Connection Size: 3/8"

Inlet Connection Type: Compression Connection Hoses

Integrated Diverter: Y

Restricted Maximum Flow Rate: 1.75 gpm

Spout Swivel: Y

Spray Included In Unit: Y Valve Material: Ceramic

Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 25.0 psi Water Pressure Recommended: 45.0 psi

### **INSPIRATION**

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

### **CODES & STANDARDS**

## **PRODUCT FEATURES**

Lever Handle

Two Function Integrated Pull Spray operated by a sliding button, switches from aerated stream to jet spray. The button returns to aerated stream when disengaged and remains in spray mode without holding down

Features a Sport Black Finish, smooth and velvety to the touch


Stocked in Chrome/Sport Black

## **CERTIFICATIONS**

# PRODUCT (NOTES)


BOND BKM12S

Bond Rally Series One Hole Gooseneck Integrated Pull Spray Kitchen Faucet with Lever Handle




TOP VIEW


SCALE: 1"=1'-0"




SPRAY AND HANDLE OPERATION



SCALE: 1"=1'-0"

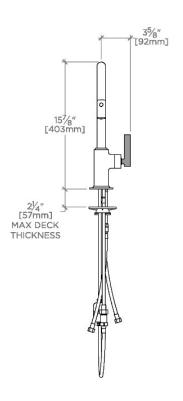


FRONT VIEW SCALE: 1"=1'-0"

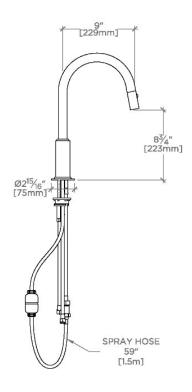


SIDE VIEW

SCALE: 1"=1'-0"

NOTE: ADAPTER AND GASKET (x2) INCLUDED -INTERNATIONAL USE ONLY





ADAPTER

NOT TO SCALE