

BOND

BKM22S

Bond Rally Series Gooseneck Kitchen Faucet and Spray with Lever Handles



SHOWN IN BOND RALLY SERIES GOOSENECK KITCHEN FAUCET AND SPRAY WITH LEVER HANDLES | BKM22S

TECHNICAL DETAILS

Deck Thickness Maximum: 1 7/16"
Deck Thickness Minimum: 1/4"
Fittings Hole Diameter: 1 3/8"
Handle Turn Angle: Quarter Turn
Handshower Spray Hose Length: 59"
Inlet Connection Size: 1/2"
Inlet Connection Type: Male with Supply Nut
Integrated Diverter: Y
Restricted Maximum Flow Rate: 1.75 gpm
Spout Swivel: Y
Spray Included In Unit: Y
Valve Material: Ceramic
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 25.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

CODES & STANDARDS

PRODUCT FEATURES

Lever Handles

Powerful Side spray with push button activation

Features a Sport Black Finish, smooth and velvety to the touch

Stocked in Chrome/Sport Black

CERTIFICATIONS


PRODUCT (NOTES)

WATERWORKS

BOND


BKM22S

Bond Rally Series Gooseneck Kitchen Faucet and Spray with Lever Handles

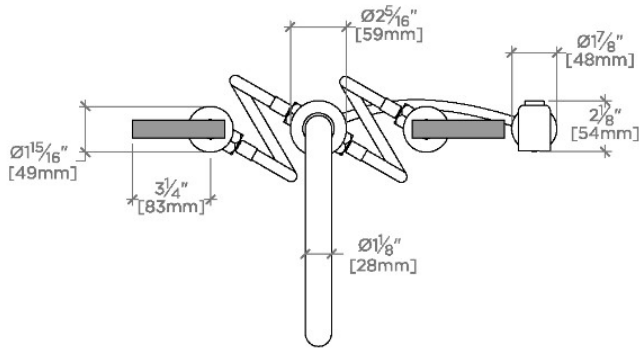


TOP VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

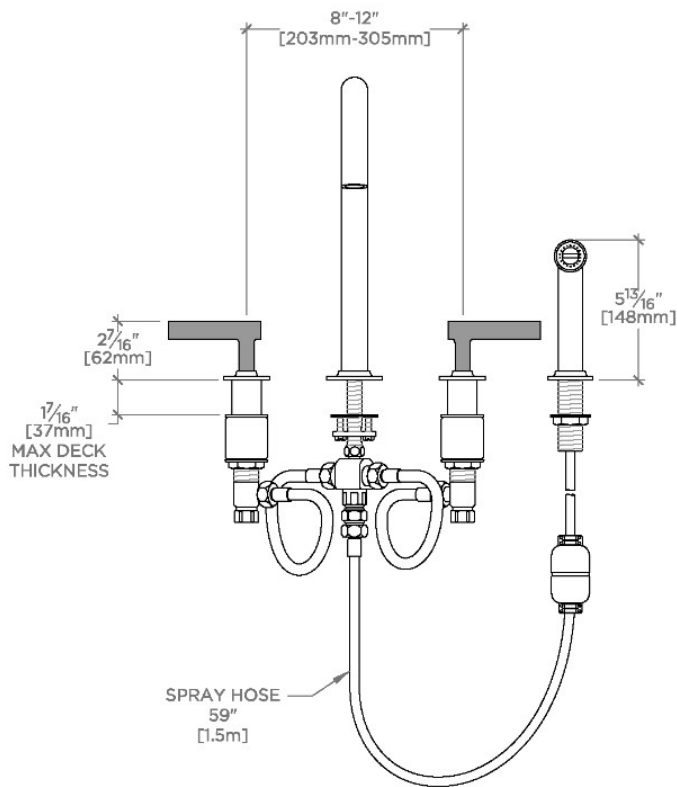

FRONT VIEW

SCALE: $1\frac{1}{2}"=1'-0"$

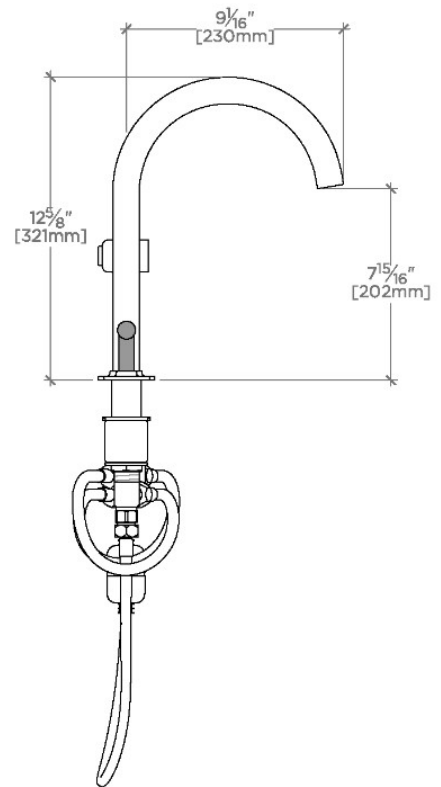

SIDE VIEW

SCALE: $1\frac{1}{2}"=1'-0"$