

BOULEVARD

BDS165

Boulevard 6" Showerhead with 8" Wall Mounted 45 Degree Shower Arm



SHOWN IN BOULEVARD 6" SHOWERHEAD WITH 8" WALL MOUNTED 45 DEGREE SHOWER ARM | BDS165

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed
Fittings Hole Diameter: 1 1/4"
Inlet Connection Size: 1/2"
Inlet Connection Type: Male NPT
Pivot: Y
Primary Material: Brass
Restricted Maximum Flow Rate: 1.75 gpm
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Inspiration from 1930s objects evokes extravagance: a strong silhouette, lavish scale and elegant decoration. Machine and artisan hands yield crisp details and curves.

CODES & STANDARDS

PRODUCT FEATURES

Made of Brass

Features a swivel 6" showerhead with easy clean rubber nozzles

Includes a 8" wall mounted 45 degree shower arm

Stocked in Brass, Chrome and Nickel

Showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS


PRODUCT (NOTES)

WATERWORKS

BOULEVARD

BDS165


Boulevard 6" Showerhead with 8" Wall Mounted 45 Degree Shower Arm

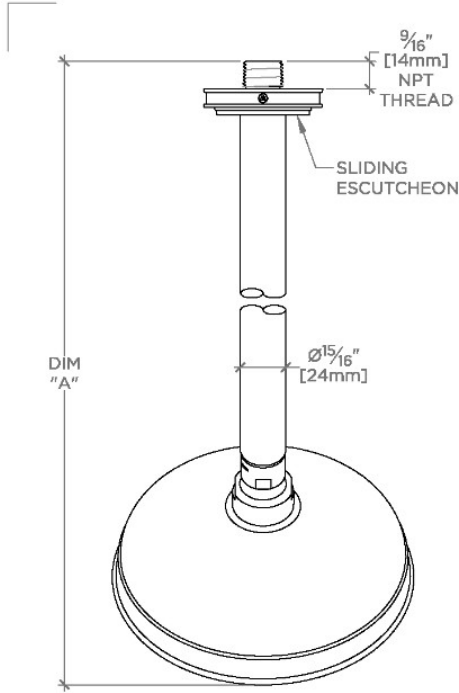

TOP VIEW


SCALE: 3"=1'-0"

STYLE NO.	DIM "A"	DIM "B"
BDS165	13 ³ / ₈ " [334mm]	8 ³ / ₄ " [209mm]
BDS166	15 ⁵ / ₈ " [384mm]	10 ¹ / ₄ " [260mm]

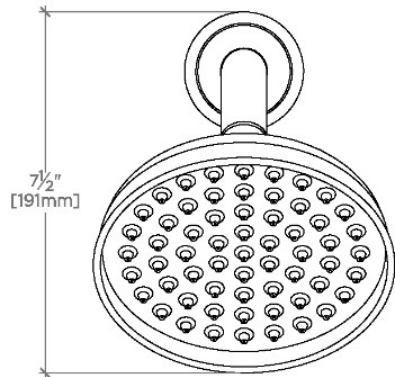

FRONT VIEW

SCALE: 3"=1'-0"

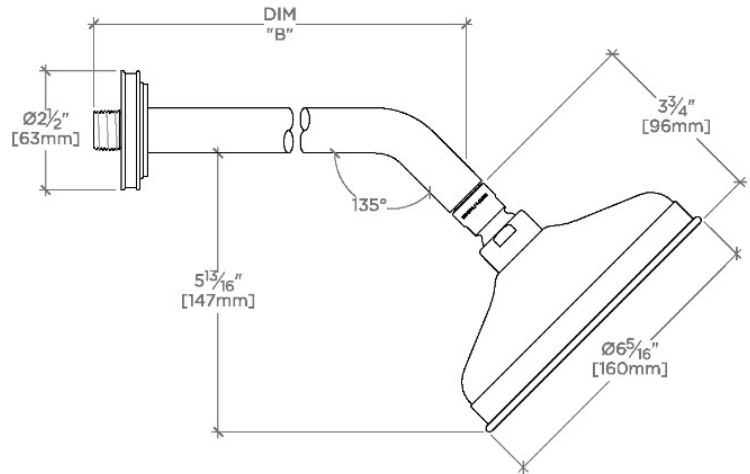

SIDE VIEW

SCALE: 3"=1'-0"