

BOND

BNS280

Bond 8" Rain Showerhead with 6" Ceiling Mounted Shower Arm



SHOWN IN BOND 8" RAIN SHOWERHEAD WITH 6" CEILING MOUNTED SHOWER ARM | BNS280

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed
Fittings Hole Diameter: 1 1/4"
Inlet Connection Size: 1/2"
Inlet Connection Type: Female Straight Threads with Rubber Washer
Pivot: Y
Primary Material: Brass
Restricted Maximum Flow Rate: 1.75 gpm
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Modern designs infused with rare soul and artistry. Explore our wide range of Bond bath and kitchen elements, from fittings to fixtures to hardware.

CODES & STANDARDS

PRODUCT FEATURES

Made of Brass

Features a swivel 8" rain showerhead with easy clean rubber nozzles

Includes a 6" ceiling mounted shower arm

Stocked in Brass, Chrome and Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate


CERTIFICATIONS

PRODUCT (NOTES)

BOND

BNS280


Bond 8" Rain Showerhead with 6" Ceiling Mounted Shower Arm

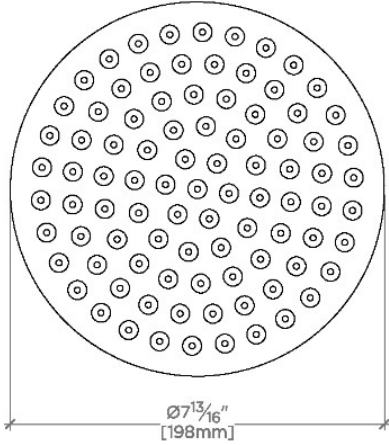

CEILING VIEW


SCALE: 3"=1'-0"

STYLE NO.	DIM "A"	DIM "B"
BNS280	10 ⁵ / ₁₆ " [261mm]	6 ⁹ / ₁₆ " [167mm]
BNS281	16 ⁵ / ₁₆ " [414mm]	12 ⁹ / ₁₆ " [319mm]

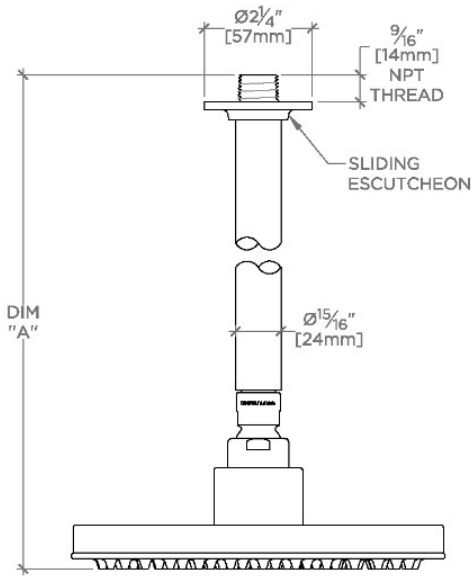

FRONT VIEW

SCALE: 3"=1'-0"

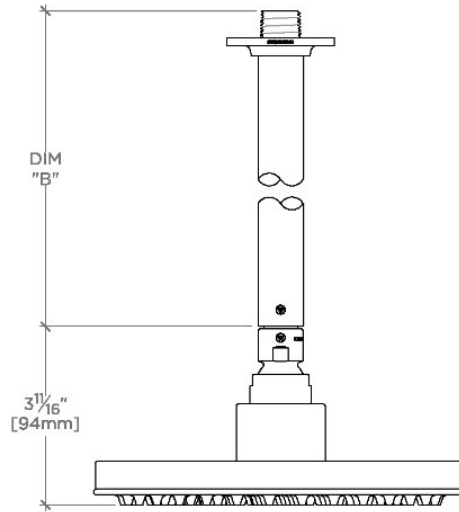

SIDE VIEW

SCALE: 3"=1'-0"