

UNIVERSAL

USH409

Universal Specialty 8 1/2" Rain Showerhead with Exposed Slotted Screws



SHOWN IN UNIVERSAL SPECIALTY 8 1/2" RAIN SHOWERHEAD WITH EXPOSED SLOTTED SCREWS | USH409

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed Spray
Inlet Connection Size: 1/2"
Inlet Connection Type: Female Straight Threads with Rubber Washer
Pivot: Y
Primary Material: Brass
Restricted Maximum Flow Rate: 1.75 gpm
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Our Universal collection features timeless designs complementing any of our Waterworks. With a wide range of product, from fittings to accessories, Universal adds exquisite proportion and balance to any environment.

CODES & STANDARDS

PRODUCT FEATURES

Made of Brass

Swiveling 8 1/2" rain showerhead

Easy clean rubber nozzles prevent calcium buildup

Stocked in Brass, Chrome and Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate


CERTIFICATIONS

PRODUCT (NOTES)


UNIVERSAL

USH409


Universal Specialty 8 1/2" Rain Showerhead with Exposed Slotted Screws

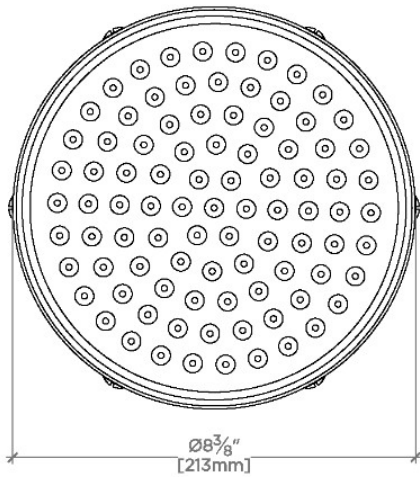

CEILING VIEW SCALE: 3"=1'-0"

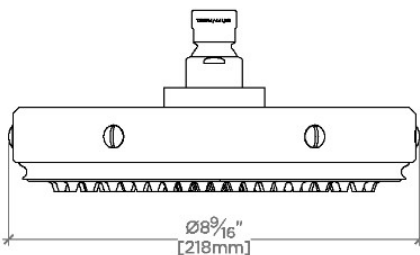

FRONT VIEW SCALE: 3"=1'-0"

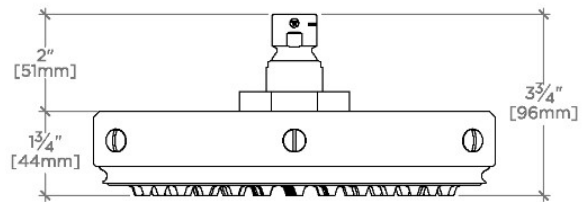

SIDE VIEW SCALE: 3"=1'-0"