

## EASTON

EAS10G

Easton 10" Rain Showerhead with 20" Wall Mounted  
Gooseneck Shower Arm



SHOWN IN EASTON 10" RAIN SHOWERHEAD WITH 20" WALL MOUNTED GOOSENECK SHOWER ARM | EAS10G

### TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed  
Fittings Hole Diameter: 1 1/4"  
Inlet Connection Size: 1/2"  
Inlet Connection Type: Female Straight Threads with  
Rubber Washer  
Pivot: Y  
Primary Material: Brass  
Restricted Maximum Flow Rate: 1.75 gpm  
Water Pressure Maximum: 85.0 psi  
Water Pressure Minimum: 20.0 psi  
Water Pressure Recommended: 45.0 psi

### INSPIRATION

Drawing on Edwardian style, Easton is the most extensive Waterworks family; a range of moods and a selection of products from fittings to furniture.

### CODES & STANDARDS

### PRODUCT FEATURES

Made of Brass

Features a swivel 10" rain showerhead with easy clean rubber nozzles

Includes a 20" wall mounted gooseneck shower arm


Stocked in Brass, Chrome and Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate


### CERTIFICATIONS

### PRODUCT (NOTES)


Easton 10" Rain Showerhead with 20" Wall Mounted  
Gooseneck Shower Arm

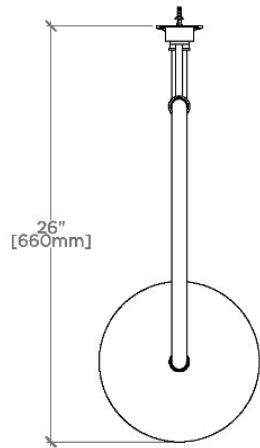

TOP VIEW SCALE: 1"=1'-0"

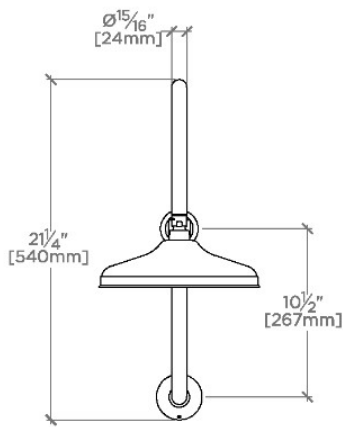

FRONT VIEW SCALE: 1"=1'-0"

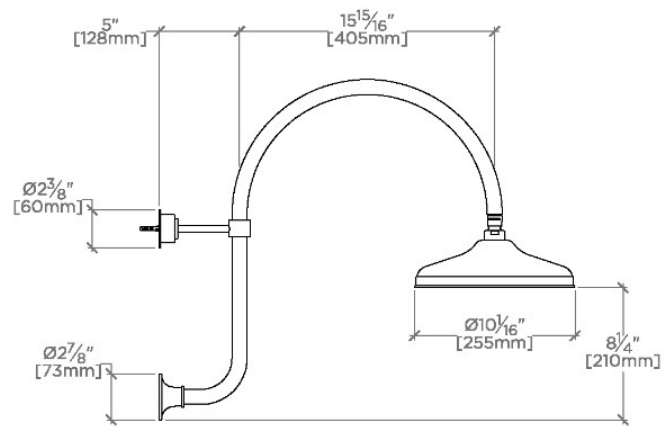

SIDE VIEW SCALE: 1"=1'-0"