OPUS OPS129

Opus 12" Rain Showerhead with 22" Wall Mounted 90 Degree Shower Arm



TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed Fittings Hole Diameter: 1 1/4" Inlet Connection Size: 1/2" Inlet Connection Type: Male NPT Pivot: Y

Primary Material: Brass Restricted Maximum Flow Rate: 1.75 gpm Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

SHOWN IN OPUS 12" RAIN SHOWERHEAD WITH 22" WALL MOUNTED 90 DEGREE SHOWER ARM | OPS129

INSPIRATION

Opus incorporates a range of sophisticated aesthetic notes, with graceful curves that create a jewel-like refinement.

CODES & STANDARDS

PRODUCT FEATURES

Made of Brass

Features a swivel 12" rain showerhead with easy clean rubber nozzles

Includes a 22" wall mounted 90 degree shower arm

Stocked in Brass, Chrome and Nickel


Rain showerhead available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS


PRODUCT (NOTES)


OPUS OPS129

Opus 12" Rain Showerhead with 22" Wall Mounted 90 Degree Shower Arm

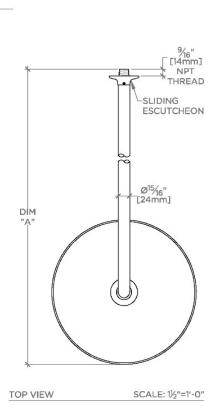

STYLE NO.	DIM "A"	DIM "B"
EAS128	24 ⁵ / ₈ " [625mm]	18 ⁹ / ₁₆ " [472mm]
OPS128		
EAS129	28 ⁵ / ₈ " [726mm]	22 ⁹ / ₁₆ " [573mm]
OPS129		



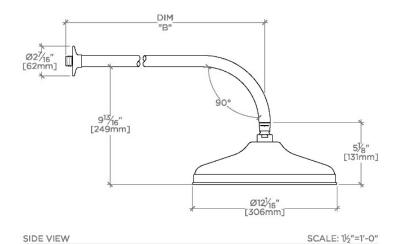

PRODUCT SUPPORT 800.927.2120 OPT 2 | WATERWORKS.COM