

## OPUS

## OPS100

Opus 10" Rain Showerhead with 6" Ceiling Mounted Shower Arm



SHOWN IN OPUS 10" RAIN SHOWERHEAD WITH 6" CEILING MOUNTED SHOWER ARM | OPS100

### TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed  
Fittings Hole Diameter: 1 1/4"  
Inlet Connection Size: 1/2"  
Inlet Connection Type: Male NPT  
Pivot: Y  
Primary Material: Brass  
Restricted Maximum Flow Rate: 1.75 gpm  
Water Pressure Maximum: 85.0 psi  
Water Pressure Minimum: 20.0 psi  
Water Pressure Recommended: 45.0 psi

### INSPIRATION

Opus incorporates a range of sophisticated aesthetic notes, with graceful curves that create a jewel-like refinement.

### CODES & STANDARDS

### PRODUCT FEATURES

Made of Brass

Features a swivel 10" rain showerhead with easy clean rubber nozzles

Includes a 6" ceiling mounted shower arm

Stocked in Brass, Chrome and Nickel

Rain showerhead available in 1.75gpm (6.6L/min) flow rate


### CERTIFICATIONS

### PRODUCT (NOTES)

## OPUS


## OPS100

Opus 10" Rain Showerhead with 6" Ceiling Mounted Shower Arm




CEILING VIEW SCALE: 1/2"=1'-0"

STYLE NO.	DIM "A"	DIM "B"
EAS100	11 1/8" [283mm]	6 9/16" [167mm]
OPS100		
EAS101	17 1/8" [435mm]	12 9/16" [319mm]
OPS101		
EAS102	23 1/8" [588mm]	18 9/16" [472mm]
OPS102		

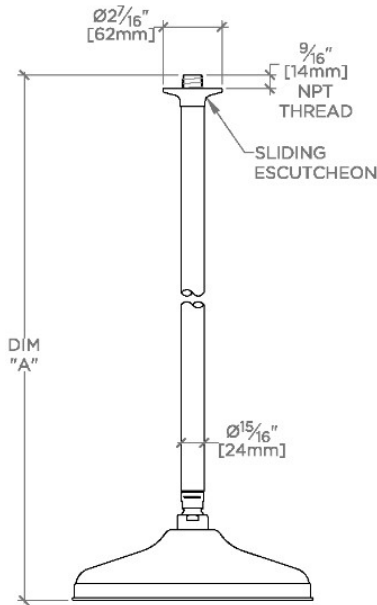

FRONT VIEW SCALE: 1/2"=1'-0"

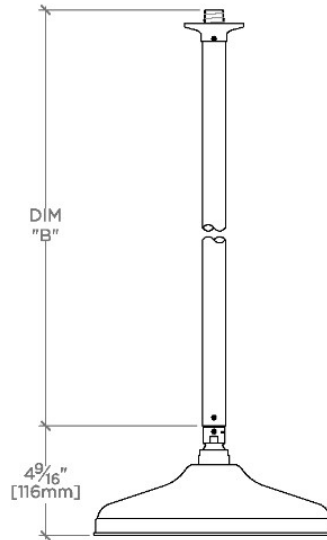

SIDE VIEW SCALE: 1/2"=1'-0"