### LUDLOW

### Ludlow Ceiling Mounted Shower Arm and Flange

### TECHNICAL DETAILS

ADA Compliance: Yes Escutcheon Primary Material: Brass Fittings Hole Diameter: 1" Depth / Width: 2 1/2" Height: 6" Inlet Connection Size: 1/2" Inlet Connection Type: Male NPT Installation Type: Ceiling Mounted Integrated Diverter: N Integrated Spray: N Length: 2 1/2" Pivot: N Primary Material: Brass Spout Swivel: N Spray Included in Unit: N Suggested Application: Bath Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

SHOWN IN LUDLOW CEILING MOUNTED SHOWER ARM AND FLANGE LDSH10

#### INSPIRATION

A touch of classic Americana. Our fresh take on iconic industrial design has clean lines and dimensional details, including exposed screws and square plates.

#### **CODES & STANDARDS**

Code # LDSH10Y: Complies with ASME A112.18.1/CSA B125.1, ADA, CEC and 0.25% Weighted Average Lead Content. Certified with IAPMO, cUPC, CEC, DOE, State of MA and WRAS.

#### **PRODUCT FEATURES**

Shower arms can be partnered with a variety of shower heads (sold separately) such as the 6" rain head or 4 1/2" shower rose.

This item is stocked in a Chrome, Nickel and Unlacquered Brass finishes.

Shower arms can be partnered with a variety of shower heads (sold separately) such as the 6" rain head or 4 1/2" shower rose.






## LDSH10

# LUDLOW

Ludlow Ceiling Mounted Shower Arm and Flange

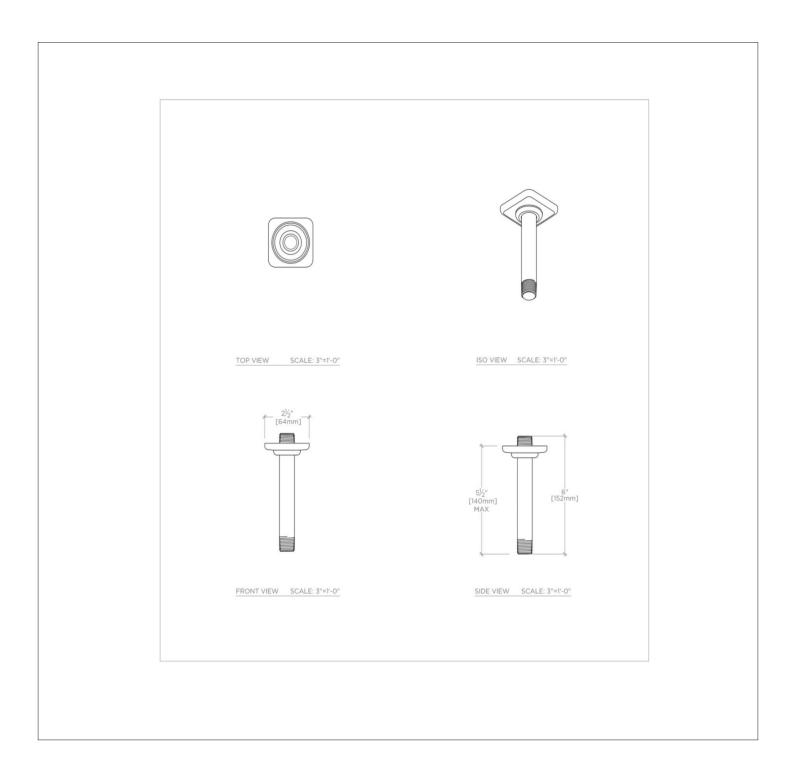

## LDSH10