LUDLOW LDLS10

Ludlow Lavatory Faucet with Lever Handles



SHOWN IN LUDLOW LAVATORY FAUCET WITH LEVER HANDLES | LDLS10

TECHNICAL DETAILS

ADA Compliance: Yes

Deck Thickness Maximum: 1.813" Deck Thickness Minimum: 3/8" Depth/Width: 7 7/16" Drain Depth Maximum: 2" Drain Depth Minimum: 0.38" Drain Hole Diameter: 1 1/2" Drain Style: USA Push Touch Escutcheon Primary Material: Brass

Flow Restriction Options: 1.0, 1.2, 1.5, 1.75, 2.2

Handle Spread Maximum: 12" Handle Spread Minimum: 8" Handle Turn Angle: Quarter Turn

Fittings Hole Diameter: 1 3/8"

Height: 3 5/16"

Inlet Connection Size: 1/2"

Inlet Connection Type: Male with Supply Nut

Inlet Supply Spread Maximum: 12" Inlet Supply Spread Minimum: 8" Installation Type: Deck Mounted

Length: 15"

Number Of Handles: Two Number Of Holes: Three Hole Primary Material: Brass

Restricted Maximum Flow Rate: 1.2 gpm

Spout Swivel: N

Suggested Application: Bath Valve Material: Ceramic

Water Pressure Maximum: 85.0 psi Water Pressure Minimum: 20.0 psi Water Pressure Recommended: 45.0 psi

INSPIRATION

Our fresh take on American industrial design comes in three styles, each of them clean-lined, and distinct to Waterworks.

CODES & STANDARDS

Code # LDLS10Y: Complies with ASME A112.18.1/CSA B125.1, ASME A112.18.2/CSA B125.2, NSF 61, NSF 372, CEC, ADA and 0.25% Weighted Average Lead Content. Certified with IAPMO, cUPC, NSF, CEC, State of MA, WRAS and EPA Watersense.

PRODUCT FEATURES

Lever Handles

Includes a Universal Push Touch Drain sized to fit US and Euro sink drain openings.

Stocked in a Chrome, Nickel and Brass

Available in 1.2gpm (4.5L/min) flow rate


CERTIFICATIONS




PRODUCT (NOTES)


LUDLOW LDLS10

Ludlow Lavatory Faucet with Lever Handles



TOP VIEW SCALE: 1½"=1'-0"

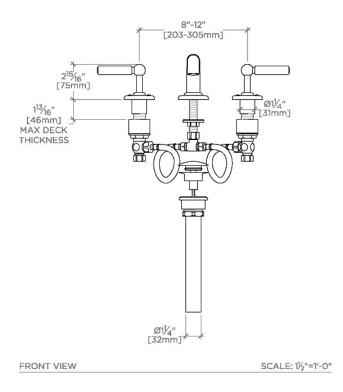

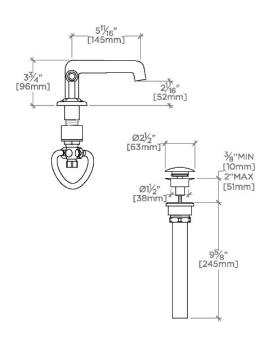

SIDE VIEW SCALE: 1/2"=1'-0"