


LUDLOW

LDHS25

Ludlow Volta Handshower on Hook

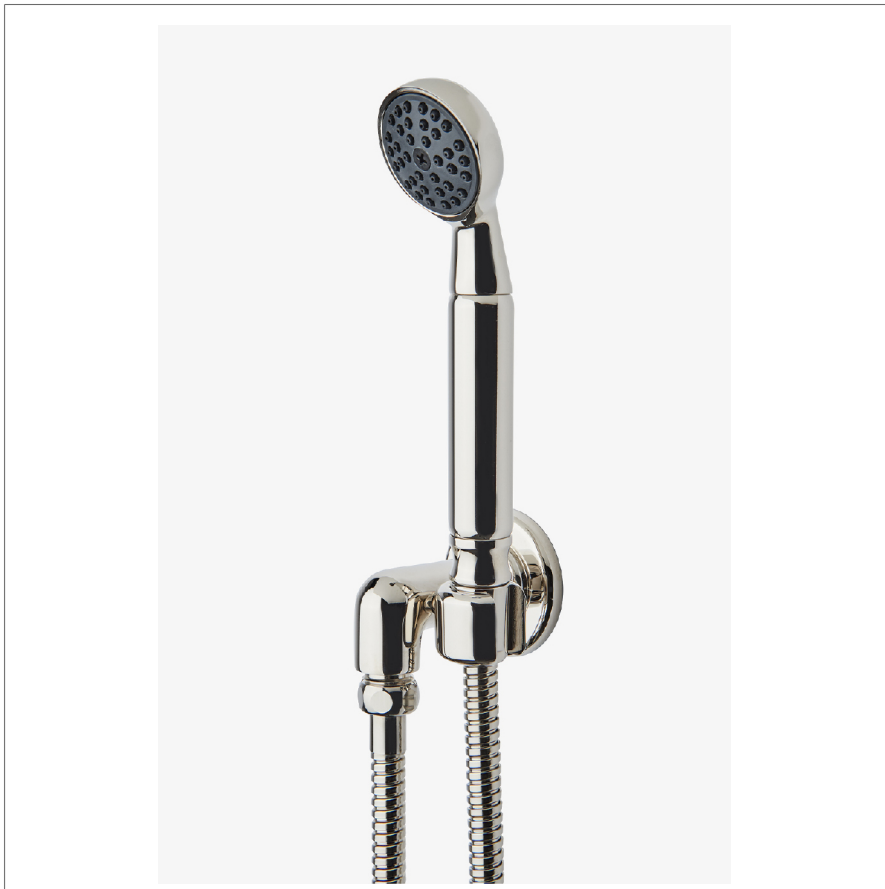

SHOWN IN LUDLOW VOLTA HANDSHOWER ON HOOK | LDHS25

TECHNICAL DETAILS

Adjustable Versus Fixed Spray: Fixed Spray
Fittings Hole Diameter: 1 3/8"
Handshower Spray Hose Length: 60"
Inlet Connection Size: 1/2"
Inlet Connection Type: Female NPT
Integrated Diverter: N
Pivot: N
Primary Material: Brass
Restricted Maximum Flow Rate: 1.75 gpm
Water Pressure Maximum: 85.0 psi
Water Pressure Minimum: 20.0 psi
Water Pressure Recommended: 45.0 psi

INSPIRATION

Our fresh take on American industrial design comes in three styles, each of them clean-lined, and distinct to Waterworks.

CODES & STANDARDS

PRODUCT FEATURES

Handshower design features metal handle with round spray pattern, a 2" Head, Rubber Nozzles for easy clean & drip reduction system

BSPF Threaded Adapter included for International Plumbing Installations.

Stocked in a Chrome, Nickel and Brass

Available in 1.75gpm (6.6L/min) flow rate

CERTIFICATIONS


PRODUCT (NOTES)

WATERWORKS

LUDLOW


LDHS25

Ludlow Volta Handshower on Hook

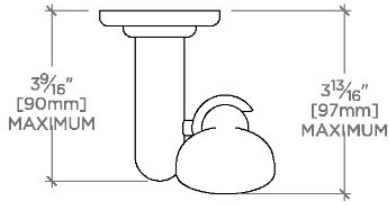


TOP VIEW

SCALE: 3"=1'-0"

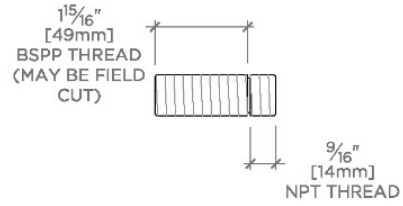


ADAPTER INCLUDED -INTERNATIONAL USE ONLY

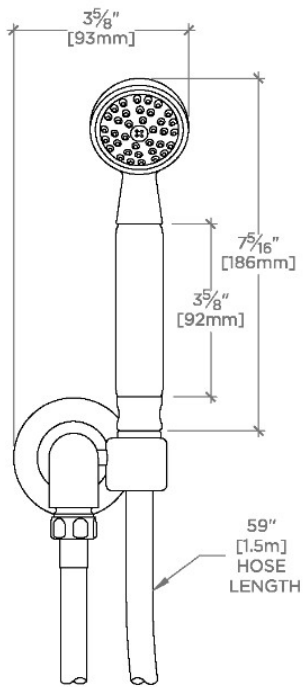

FRONT VIEW

SCALE: 3"=1'-0"

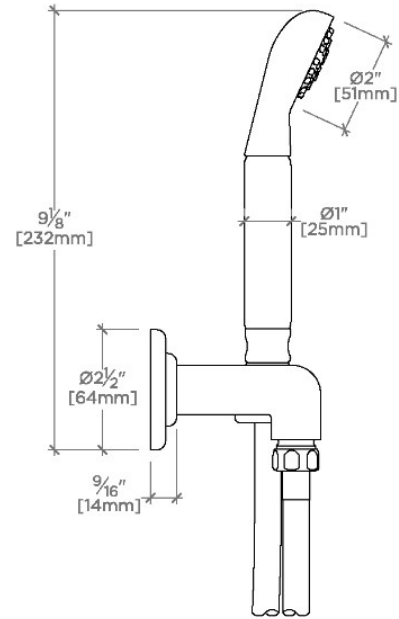

SIDE VIEW

SCALE: 3"=1'-0"